


## MERKEL U-RING NI 300

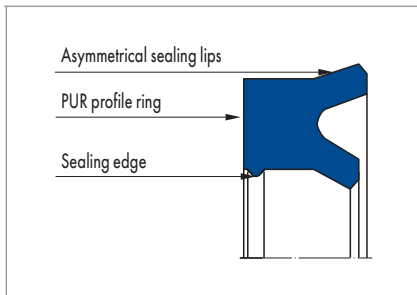

### PRODUCT DESCRIPTION

Merkel U-ring with asymmetrical profile, inner lip set back, additional support edge and sealing edge as well as press fit at the outside diameter.

### PRODUCT ADVANTAGES

Single-acting rod seal for standardised housings, amongst others, according to ISO 5597.

- Very good static and dynamic tightness
- Additional sealing edge, prevents ingress of dirt to a large degree
- Recommended for use in combination with single-acting wipers

### APPLICATION

- Earth moving equipment
- Cranes
- Presses
- Support cylinders

### MATERIAL

Material	Code	Hardness
Polyurethane	94 AU 925	90 Shore A

### OPERATING CONDITIONS

Pressure p	40 MPa
Running speed v	0,5 m/s

Medium/ Temperature	94 AU 925
Hydraulic oils HL, HLP	-30 °C ... +110 °C
HFA fluids	+5 °C ... +50 °C
HFB fluids	+5 °C ... +50 °C
HFC fluids	-30 °C ... +40 °C
HFD fluids	-
Water	+5 °C ... +40 °C
HETG (rapeseed oil)	-30 °C ... +60 °C
HEES (synthetic ester)	-30 °C ... +60 °C
HEPG (glycol)	-30 °C ... +40 °C
Mineral greases	-30 °C ... +110 °C

### DESIGN NOTES

Please observe our general design notes in → Technical Manual.

#### Surface quality

Peak-to-valley heights	R <sub>a</sub>	R <sub>max</sub>
Sliding surface	0,05 ... 0,3 µm	≤2,5 µm
Groove base	≤1,6 µm	≤6,3 µm
Groove flanks	≤3,0 µm	≤15,0 µm

Percentage contact area M<sub>p</sub> >50% to max. 90% at cutting depth c = Rz/2 and reference line C ref = 0%.

#### Admissible gap dimension

The decisive factor for the function of the seal is the largest gap dimension occurring during operation on the non-pressurised side of the seal. → Technical Manual.

Profile dimension	16 MPa	26 MPa	32 MPa	40 MPa
>4,0 mm ... ≤5,0 mm	0,50 mm	0,40 mm	0,35 mm	0,30 mm
>5,0 mm ... ≤7,5 mm	0,55 mm	0,45 mm	0,40 mm	0,35 mm
>7,5 mm ... ≤12,5 mm	0,66 mm	0,50 mm	0,45 mm	0,40 mm
>12,5 mm	0,60 mm	0,55 mm	0,50 mm	0,45 mm

#### Tolerances

The admissible gap width, tolerances, guide play and deflection of the guide under load are to be taken into account when designing D2. → Technical Manual.

Nominal Ø d	D	d
4 ... 260 mm	H11	f8

### FITTING & INSTALLATION

Careful fitting is a prerequisite for the correct function of the seal. → Technical Manual.